


Modular Flake-Ice Machine 200 Kg




Stainless Steel

Electronic Controls




MF 36 + B193
(sold separately)



MF 36 + B393 + KBT103
(sold separately)



MF 36 + B393 + kbt103
(sold separately)



MF 36 + RB400
(sold separately)

Features

- Modular Flake-ice machine, production up to 200 kg in 24 hours.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in ABS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Choice of air or water-cooled condenser.
- Electronic control board with self diagnostic and malfunction alarms.
- Produces Flake Ice, extruded at a temperature just below 0°C, contains 25% residual water content, hence very rich in moisture.

MF 36 Technologies



		24h			
		10°: 10°C	21°: 15°C		
		[kg]	[lbs]	[kg]	[lbs]
MF 36 AS		200	441	185	408
MF 36 WS		200	441	190	418
					[WxDxH mm] 563x536x525
					[WxDxH inches] 22 3/16" x 21 1/8" x 20 5/8"
					 [v/Hz/ph] 230/50/1
					 R 404 a

This product qualifies for the following listings:



Umidity 25%

Ice in its most natural form, made at a temperature just below zero degrees Celsius, contains 25% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.com
www.scotsman-ice.it

Models and specifications are subject to change without notice.

Modular Flake-Ice Machine 200 Kg

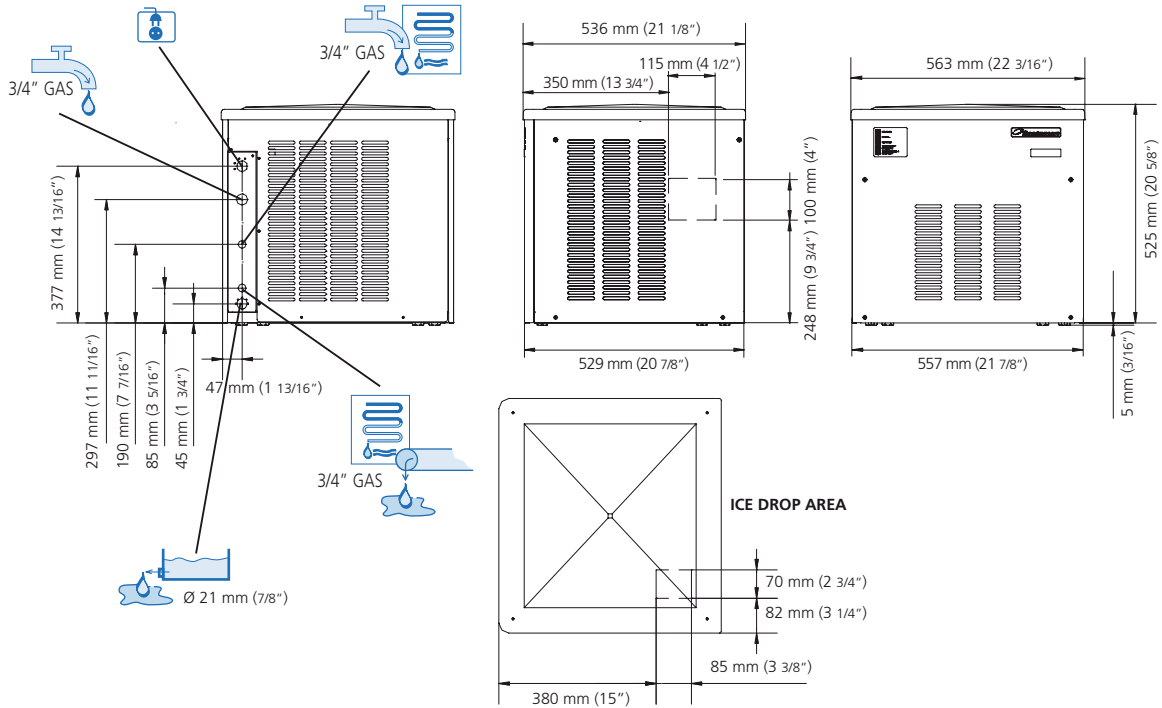

MF 36 AIR COOLED

°C °F	50° 10°		60° 15°		70° 21°		90° 32°	
	10°	200	193	186	172	172	172	kg
50°	441	425,5	410	379	379	379	lbs	
21°	192	185	178	164	164	164	kg	
70°	423	408	392	361	361	361	lbs	
32°	372,5	162	155	141	141	141	kg	
90°	227	357	342	311	311	311	lbs	
38°	153	146	139	125	125	125	kg	
100	337	322	306	275,5	275,5	275,5	lbs	

24h

MF 36 WATER COOLED

°C °F	50° 10°		60° 15°		70° 21°		90° 32°	
	10°	200	193	186	172	172	172	kg
50°	441	425,5	410	379	379	379	lbs	
21°	197	190	183	169	169	169	kg	
70°	419	403	372,5	342	342	342	lbs	
32°	189	182	175	161	161	161	kg	
90°	317	401	386	355	355	355	lbs	
38°	183	176	169	155	155	155	kg	
100	403	388	372,5	342	342	342	lbs	

24h

Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	+	-	[Btu/h]	[W]	[Ømm ²]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	[gal/h]	[kg]	[lbs]	[kg]	[lbs]
MF 36 AS	32°C 90°F	21°C 70°F	6760	1980	3 x 1,5	760	10 A	9,2	6.5	1.7	49	108	56	123
MF 36 WS			6760	1980	3 x 1,5	760	10 A	9,2	102	27	49	108	56	123

CONTACT POINTS:

Europe
Scotsman Europe-Frimont S.p.A.
Via Puccini, 22
20010 Pogliano (Milano) Italy
Ph: (+39) 02-93960208
Fax: (+39) 02-93960201
scotsman.europe@frimont.it

Asia and Pacific
Scotsman Ice Systems-Frimont S.p.A. (R.O.)
627A Aljunied Road-#04-04 Biztech Centre
Singapore 389842
Ph: (+65) 6738 5393
Fax: (+65) 6738 1959
scotsice@singnet.com.sg

China
Scotsman Ice Systems (Shanghai) Co. Ltd
613 Kaixuan Road, Building G
Shanghai, China 200051
Ph: (+86) 2161526100
Fax: (+86) 2161526020
sales@enodis.com.cn - service@enodis.com.cn

Middle East & N. Africa
Scotsman Ice Systems Dubai Office
P.o. Box 21648
Sharjah - U.A.E.
Ph: (+97) 16-5773-164
Fax (+97) 16-5773-165
scotsman@eim.ae

South Africa
Scotsman Ice Systems SA (PTY) Ltd.
10, Rhodes Street - Kensington B
P.o. Box 44 - Riverclub 2149
Ph: (+27) 11-7898400
Fax (+27) 11-7898411
scotsman@telkomsa.net

USA, Canada, Latin America
Scotsman Ice Systems USA
775 Corporate Woods Parkway
Vernon Hills, IL 60061
Ph: (+1) 847 215-4550
Fax (+1) 847 913-9844
customer.service@scotsman-ice.com